

Model AM708 H/S**Featuring**

- ▶ High Resolution Wind Speed (0.1m/s) & Direction (1°) Anemometer
- ▶ Temperature Resistant & Moisture Proof Mechanic Design & Salt Proof
- ▶ 8 inch High Brightness LCD Display
- ▶ Digital & Analog Display

Marine Anemometer **AM708 H/S**


Specifications

Product	Marine Anemometer	Power Supply	AC 220V / 24V DC ≤ 5W
Model	AM708	Operation Temperature	− 25 to +55 degree C
Display	8" TFT / 800x600 pixels	Storage Temperature	− 20 to +70 degree C
Brightness Adjustment	9 Levels Adjustable	Humidity	10~90% relative, no condensation
Data Output	NMEA0183 Wind Speed & Direction	Weight	H : 9kg / S : 12kg
NMEA Port	RS422 Output 2pin NMEAA/B	Protection	IP23
Direction Accuracy	± 1°		
Wind Range	0 ~ 359°	Sensor	
Speed Accuracy	0.1m/s	Model	AM708 H / S
Speed Range	1.2 ~ 60m/s	Material	H : Plastic / S : Stainless
Starting Wind Speed	≤ 1.2m/s	Protection	IP56


Dimension Drawings

Unit : mm


AM708 H

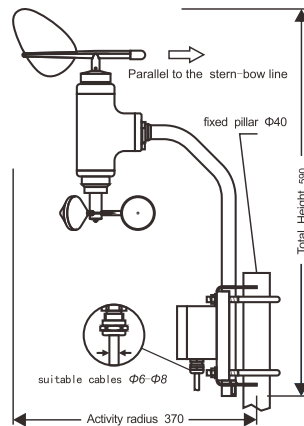


AM708 S

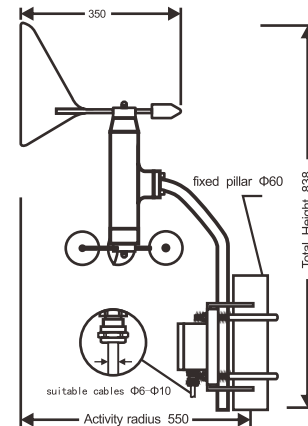

Vertical Installation

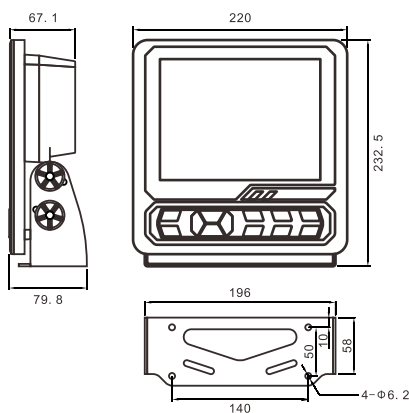

Embedded Installation

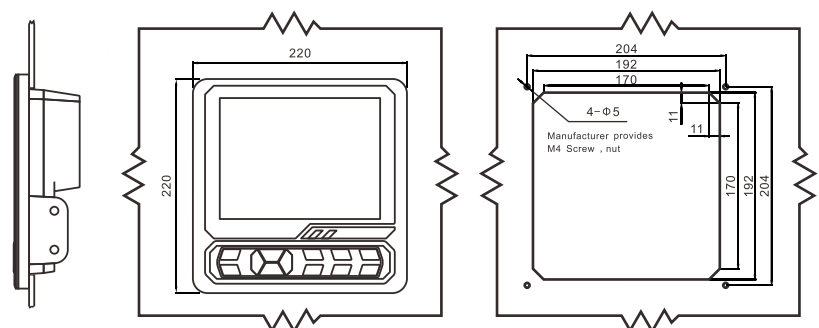

Wenden Radio Co., Ltd.

No.34 Fozhong Rd., Kaohsiung 806,
Taiwan

T E L : + 886-7-8213101

F A X : + 886-7-8418649

E-Mail : info@wenden.com.tw

www.wenden.com.tw



NOTE

All specifications are provisional and Subject to change without notice or obligation

For details, please contact: