


WDA-100 / WAI-310

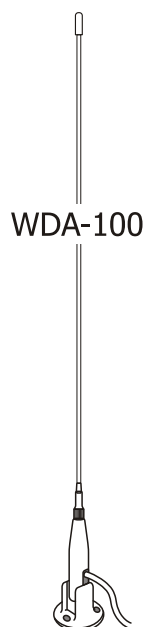


DSB Antenna WDA-100

- 36" top loading fiberglass antenna
- Nylon lift and lay mount with leveling plate
- 10 meters RG-58 coaxial cable with PL259 connector
- Include marine antenna base mount

Electrical specifications:	
Frequency Range (MHz)	26.0-27.5
Nominal Impedance (ohm)	50
Power Rating (watts)	25
Gain (dBd / Marine dB)	3
VSWR	< 1.5:1
Pattern	Vertical
Polarization	Vertical
Cable / Connector	RG58 / PL-259

Mechanical specifications:	
Height (meter / ft)	1.0813
Weight (kg / lbs)	0.80 / 1.76
Finish	Polyurethane lacquer
Color	White
Temperature Range (°C/°F)	-40~+60 / -40~+140

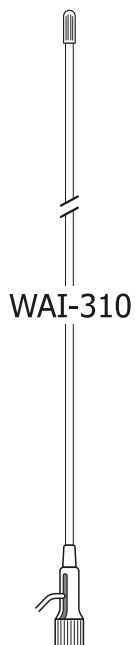

AIS antenna WAI-310

- 3 ft fiberglass antenna
- 3 dB gain
- Center Fed 1/2 wave with brass and copper element
- 10 meters RG-58 coaxial cable with PL259 connector

Electrical specifications:	
Frequency Range (MHz)	160.0-164.0
Nominal Impedance (ohm)	50
Power Rating (watts)	25
Gain (dBd / Marine dB)	3
VSWR	< 1.5:1
Pattern	Vertical
Polarization	Vertical
Cable / Connector	RG58 / PL-259

Mechanical specifications:	
Height (meter / ft)	1.18 / 3
Weight (kg/lbs)	1.00 / 2.20
Finish	Polyurethane lacquer
Color	White
Temperature range (°C/°F)	-40~+60 / -40~+140


NOTE

All specifications are provisional and subject to change without notice or obligation

For details, please contact: