



WVA-510 / WVA-810

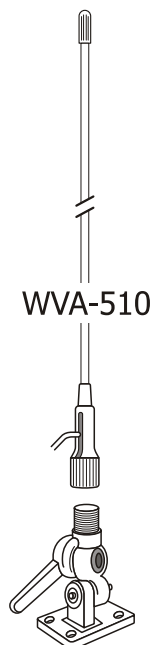

VHF antenna WVA-510

- 5 ft fiberglass antenna
- 3 dB gain
- Center Fed 1/2 wave with brass and copper element
- 10 meters RG-58 coaxial cable with PL259 connector
- Include marine antenna base mount

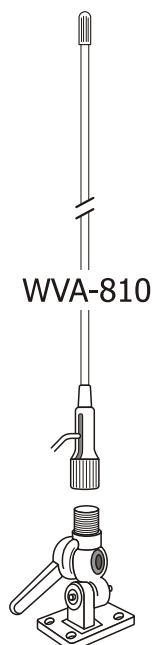

VHF antenna WVA-810

- 8 ft fiberglass antenna
- 6 dB gain
- Center Fed 1/2 wave with brass and copper element
- 10 meters RG-58 coaxial cable with PL259 connector
- Include marine antenna base mount

Electrical specifications:

Frequency Range (MHz)	152.0-163.0
Nominal Impedance (ohm)	50
Power Rating (watts)	25
Gain (dBd / Marine dB)	3
VSWR	< 1.5:1
Pattern	Vertical
Polarization	Vertical
Cable / Connector	RG58 / PL-259

Mechanical specifications:

Height (meter / ft)	1.60 / 5
Weight (kg / lbs)	1.21 / 2.67
Finish	Polyurethane lacquer
Color	White
Temperature Range (°C/°F)	-40~+60 / -40~+140

Electrical specifications:

Frequency Range (MHz)	152.0-163.0
Nominal Impedance (ohm)	50
Power Rating (watts)	25
Gain (dBd / Marine dB)	6
VSWR	< 1.5:1
Pattern	Vertical
Polarization	Vertical
Cable / Connector	RG58 / PL-259

Mechanical specifications:

Height (meter / ft)	2.42 / 8
Weight (kg / lbs) 0.88	1.27 / 2.80
Finish	Polyurethane lacquer
Color	White
Temperature Range (°C/°F)	-40~+60 / -40~+140