


Marine LCD Monitor

Model: HM-2612



Keypad Functions



- [1] **[[AUTO]] key**: Automatically adjust to the center display; or return to the previous menu.
- [2] **[[MENU]] key**: See the details behind.
- [3] **[[+]] key**: Press [+] key to increase the brightness of the display or flip down the menu.
- [4] **[[−]] key**: Press [-] key to reduce the brightness of the display or flip up the Menu.
- [5] **[[EXIT]] key**: To turn ON/OFF the monitor, but the core board still working.
- [6] **[[⏻]] key**: Exit from current menu, or back to the previous menu.

Features

- ▶ 12.1 inch 1024X768(XGA) resolution with wide temperature range, LED backlight glare-resistant display.
- ▶ Support VGA interface.
- ▶ Power Supply: DC12V~36 V.
- ▶ Adjust brightness by knob.
- ▶ Designed for Counter mounting and Flush mounting.




HM-2612 SPECIFICATIONS

Display Unit	HM-2612
Display Type	Color TFT LCD
Screen Size	12.1 inch (246mm×184mm)
Display Resolution	1024 × 768 pixels (XGA)
Colors	16. 7M
Screen Brightness	420cd/m ²
Viewing Angle	Horizontal:160 degree Vertical: 140 degree
Contrast Ratio	550:1
Video Input	Analog VGA(15 pins D-SUB Connector)
Operating Temperature	-15°C ~ +55°C
Storage Temperature	-20°C ~ +60°C
Power Supply	DC12V ~ 36 V
Compatible Resolution	1024×768; 800×600; 640×480.....
Menu Language	Chinese, English, French,German, Spanish, Italian, Japanese, Korean, Portuguese, Brazil Portuguese

Packing List


Main Unit×1set	Power Cable ×1 pc
VGA Cable ×1 pc	User's Manual ×1 pc
Mounting Bracket×2pcs	Wood Screw ×4 pcs
Mounting Bracket Screw (L) with 2pcs of rubber ring x 2 sets	
Mounting Bracket Screw (S) with 2pcs of rubber ring x 2 sets	

» Perspective Adjustment

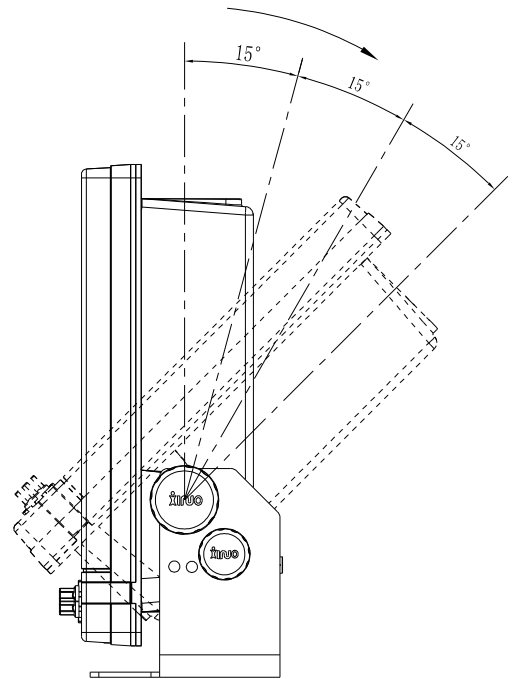


» Display Unit

Counter Mounting (3kg / 6.6lb)

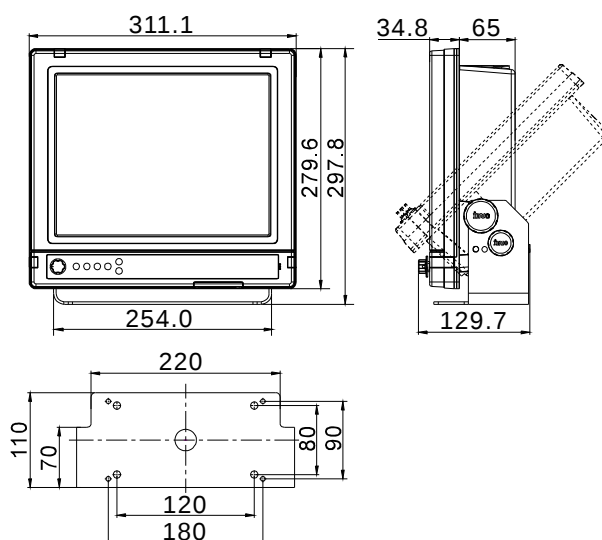

Flush Mounting (2.4kg / 5.28lb)

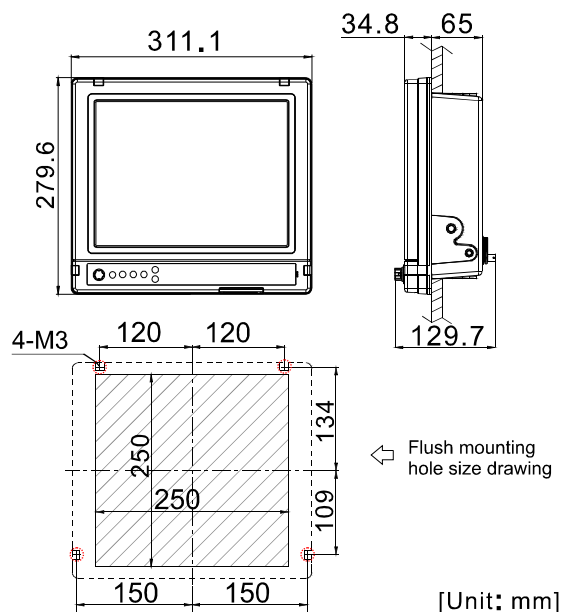

[Unit: mm]



Dealer: