


Marine LCD Monitor

Model: HM-2619



Keypad Functions

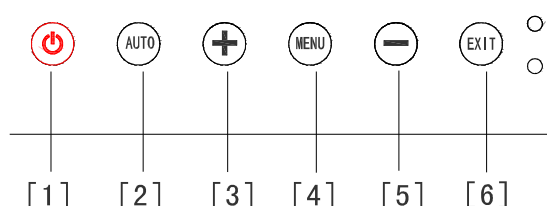

- [1] **[Power]** key: To turn ON/OFF the monitor, but the core board still working.
- [2] **[AUTO]** key: Automatically adjust to the center display; or return to the previous menu.
- [3] **[+]** key: Press **[+]** to adjust the volume or choose the sub menu which one you want to set.
- [4] **[MENU]** key: See the details behind.
- [5] **[-]** key: Press **[-]** to adjust the volume or choose the sub menu which one you want to set.
- [6] **[EXIT]** key: Exit from current menu, or back to the previous menu.

Features


- ▶ 19 inch LED backlight LCD with 1280 x 1024(SXGA) resolution, high brightness and wide temperature range.
- ▶ Support VGA、DVI、 HDMI interface.
- ▶ Adjust brightness by knob.
- ▶ Designed for Counter mounting and Flush mounting.
- ▶ Optional: AC220V or DC24V




HM-2619 SPECIFICATIONS

Display Unit	HM-2619
Display Type	Color TFT LCD
Screen Size	19 inch (376mmx301mm)
Display Resolution	1280 x 1024 (SXGA) pixels
Colors	16.7M
Screen Brightness	600cd/m ²
Viewing Angle	Horizontal: 150 degree Vertical: 140 degree
Contrast Ratio	800:1
Video Input	VGA ; DVI; HDMI
Operating Temperature	-15°C~+55°C
Storage Temperature	-20°C~+60°C
Power Supply	AC 220 V Or DC 24V
Compatible Resolution	1280*1024; 1024*768; 800*600; 640*480.....
Menu language	English, simplified Chinese, German, Italian, French, Spanish, Portuguese, Korean

» Perspective Adjustment

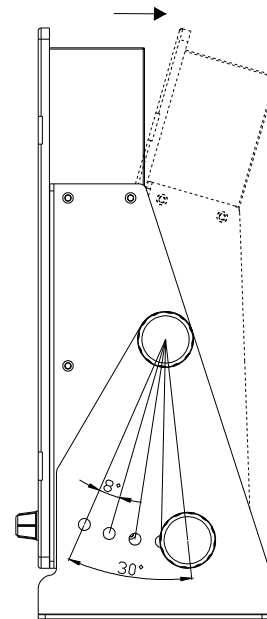

» Interface Definition

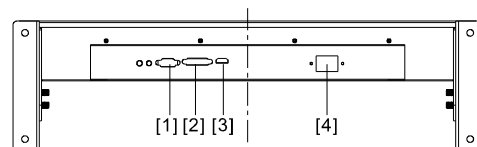


[1] VGA [2] DVI [3] HDMI [4] POWER

Packing List


Main Unit×1set	Power Cable ×1 pc
HDMI Cable ×1 pc	User's Manual ×1 pc
VGA Cable ×1 pc	Wood Screw ×4 pcs
Mounting Bracket×2pcs	
Mounting Bracket Screw (L) with 2pcs of rubber ring x 2 sets	
Mounting Bracket Screw (S) with 2pcs of rubber ring x 2 sets	

» Display Unit

Counter Mounting

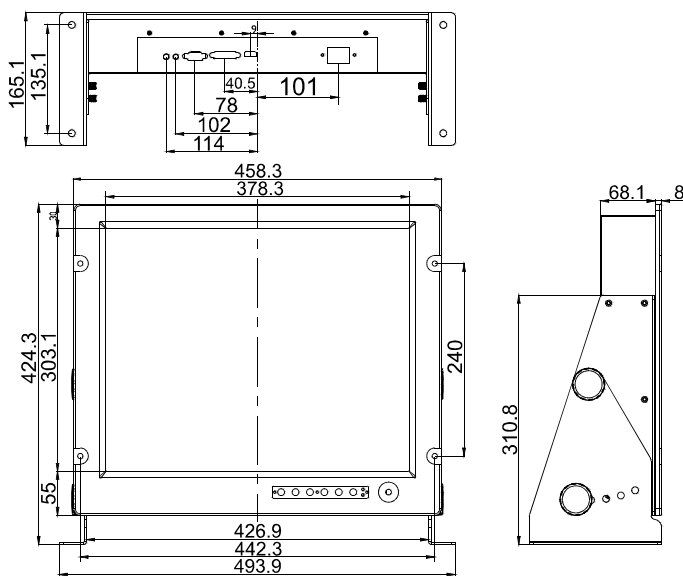

Flush Mounting

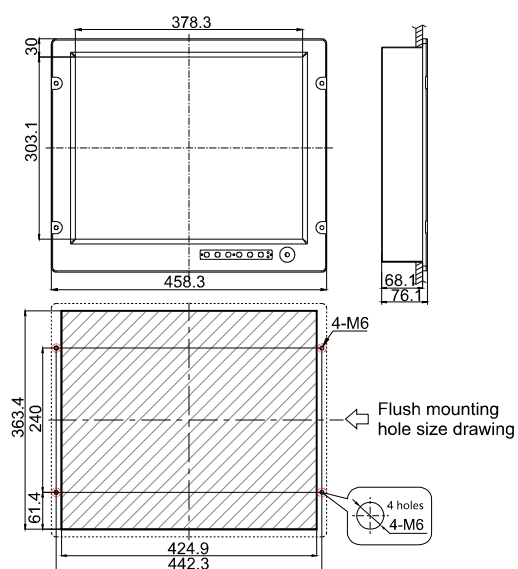

[Unit: mm]



Dealer: