



## Marine GPS Chart Plotter

Model **XF-607 / 1069**

*Reliable navigation safety*




- XF-607 7" color TFT LCD screen
- XF-1069 10.4" color TFT LCD screen
- Tides & Currents data
- Fast and Smooth Zoom
- Display of various types of information
- AIS function available
- Enhanced Port Information database
- Various marks and greater numbers of ship's track

## Specifications

|                             |                                                     |                     |
|-----------------------------|-----------------------------------------------------|---------------------|
| Model                       | XF-607                                              | XF-1069             |
| Display                     | 7" color TFT LCD                                    | 10.4" color TFT LCD |
| Display Resolution          | 800 x 480 pixels                                    | 640 x 480 pixels    |
| Microprocessor              | ARM9 2410                                           |                     |
| Zooming Scale               | 0.01NM ~ 200NM                                      |                     |
| Track Color                 | 8 colors                                            |                     |
| Track Points Memory         | 200 lines, 100,000 points                           |                     |
| Waypoint Marks Memory       | 10,000 points                                       |                     |
| Routes Memory               | 200 lines                                           |                     |
| Light Marks Memory          | 1,000 points                                        |                     |
| Receiver                    | GPS 12 channels, SBAS (WAAS/EGNOS/GAGAN/MASA); RTCM |                     |
| Receiver Frequency          | L1 (1575.42MHz)                                     |                     |
| Media                       | USB port                                            |                     |
| Keyboard                    | Silicon rubber, backlight                           |                     |
| Interface                   | NMEA-0183/RS422                                     |                     |
| AIS Function                | Available                                           |                     |
| Input Voltage               | DC 10-36V                                           |                     |
| Power Consumption           | < 20W (approx)                                      |                     |
| Water Resistance            | IPX6                                                |                     |
| Operating Temperature Range | -15°C to +55°C. IEC 60945                           |                     |

## Connection

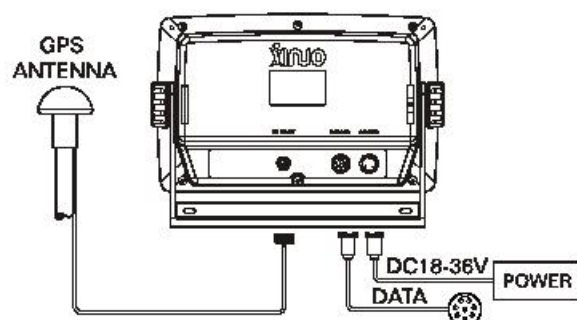


## Equipment List


|                     |                                                                     |       |
|---------------------|---------------------------------------------------------------------|-------|
| Standard Equipments | Display unit                                                        | 1 set |
|                     | Mounting bracket & bolts, Power cable, User manual, Quick reference | 1 set |
|                     | GPS Antenna                                                         | 1 pc  |
| Optional Equipments | NMEA output cable with plug                                         | 1 pc  |

## Dimension Drawings

XF-607

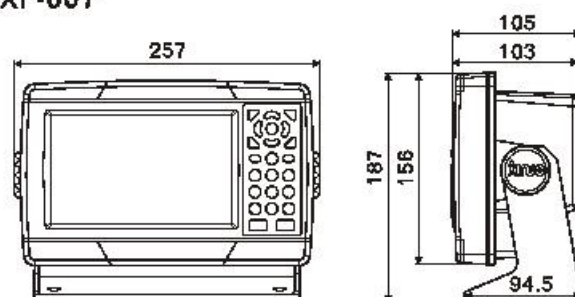

XF-1069

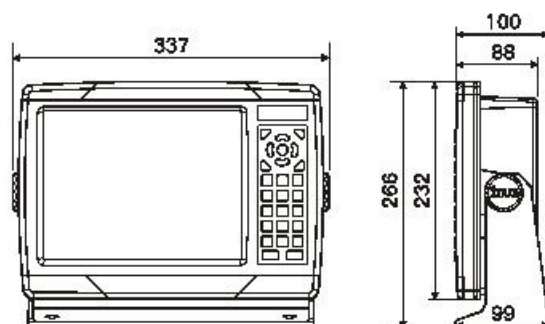

Unit : mm

## Wenden Radio Co., Ltd.

No.71 Tsueiheng N. Road, Kaohsiung 806, Taiwan

T E L : + 886-7-8213101

F A X : + 886-7-8418649

E-Mail : sales@wenden.com.tw

[www.wenden.com.tw](http://www.wenden.com.tw)



NOTE

All specifications are provisional and Subject to change without notice or obligation

For details, please contact: